


# harman/kardon®

## SUBWOOFER MOUNTING ASSEMBLY AND INSTALLATION

Mounting Plate



x1

Mounting Plate  
Spacers



x4

Countersunk  
Screws #6-1¾"



x4


Button Head  
Flange Screws  
#8-¾"



x4

### Step 1.

Remove the four existing screws mounting speaker grill at the bottom of the subwoofer. Do not remove the speaker grill.

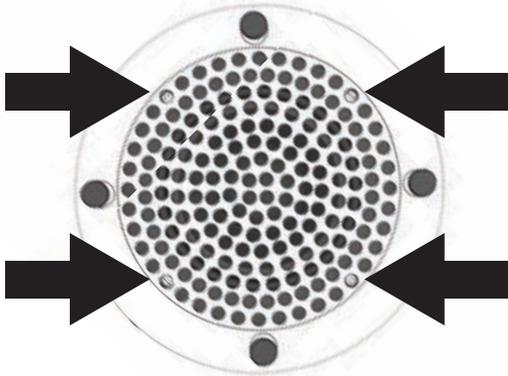

### Step 2.

Place included spacers over each screw hole.



### Step 3.

Align the mounting plate over the spacers. Secure the plate using the included Countersunk Screws #6-1¾"



### Step 4.

Mount the subwoofer underneath the desktop using the included Button Head Flange Screws #8-¾"

